

# **PS2-600 HRE-03H**

### Solar Submersible Pump System for 4" wells

### System Overview

Head max. 180 m Flow rate max. 0.45 m<sup>3</sup>/h

#### **Technical Data**

#### Controller PS2-600

- Controlling and monitoring
- Control inputs for dry running protection, remote control etc.
- Protected against reverse polarity, overload and overtemperature
- Integrated MPPT (Maximum Power Point Tracking)
- Battery operation: Integrated low voltage disconnect

max. 0.70 kW Input voltage max. 150 V Optimum Vmp\*\* > 68 V Motor current max. 13 A Efficiency max. 98 % -40...50 °C Ambient temp. Enclosure class IP68

#### **Motor ECDRIVE 600-HRE**

- Maintenance-free brushless DC motor
- Premium materials, stainless steel: AISI 304/316
- No electronics in the motor

Rated power 0.70 kW Efficiency max. 92 % Motor speed 900...3,300 rpm Insulation class IP68 Enclosure class Submersion max. 150 m

#### Pump End PE HRE-03H\*\*\*

- Non-return valve
- Premium materials, stainless steel: AISI 304/316
- Helical rotor pump

Efficiency max. 65 %



#### Pump Unit PU600 HRE-03H (Motor, Pump End)

Borehole diameter min. 4,0 in Water temperature max. 50 °C

#### **Standards**



2006/42/EC, 2004/108/EC, 2006/95/EC

IEC/EN 61702:1995, IEC/EN 62253 Ed.1

The logos shown reflect the approvals that have been granted for this product family. Products are ordered and supplied with the approvals specific to the market

\*\*Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

\*\*\*Specify temperature range on order









# **PS2-600 HRE-03H**

Solar Submersible Pump System for 4" wells

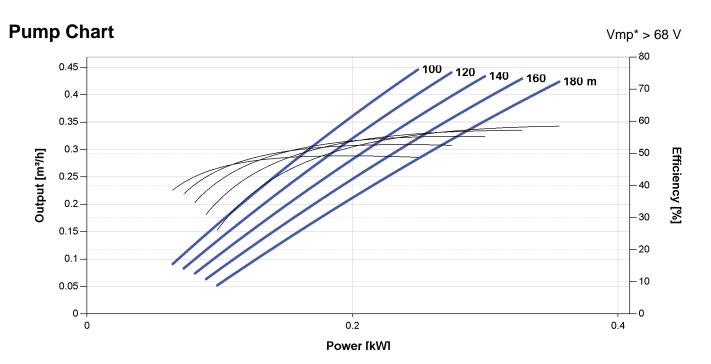


## **Dimensions and Weights**



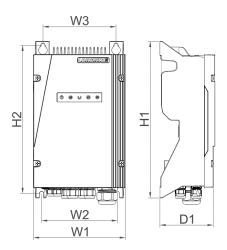

#### **Pump Unit**

A = 980 mm B = 205 mm C = 775 mm D = 96 mm E = 147 mm S = 1.25 in



	Net weight
Controller	5.6 kg
Pump Unit	11 kg
Motor	6.7 kg
Pump End	4.0 kg

<sup>\*</sup>Vmp: MPP-voltage under Standard Test Conditions (STC): 1000 W/m² solar irradiance, 25 °C cell temperature

#### BERNT LORENTZ GmbH

Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany, Tel +49 (0)4193 8806-700, www.lorentz.de



